

E-XHEADTM
swiss made

PRECISION
EXTRUSION
TECHNOLOGY

E-XHEAD.COM


Technology to improve
your extrusion line
performance

CROSSHEAD MODEL C

QUICK COLOUR CHANGE SYSTEM

*ULTRA QUICK COLOUR CHANGE
E-XHEAD R® SYSTEM RAPID HEAD CHANGE
DRASTIC REDUCTION OF DOWN TIME & SCRAP
SYSTEM CAN BE ADAPTED TO ANY EXTRUSION LINE
VERY EASY MAINTENANCE*


E-XHEAD PRECISION EXTRUSION CROSSHEADS FOR ALL EXTRUDERS

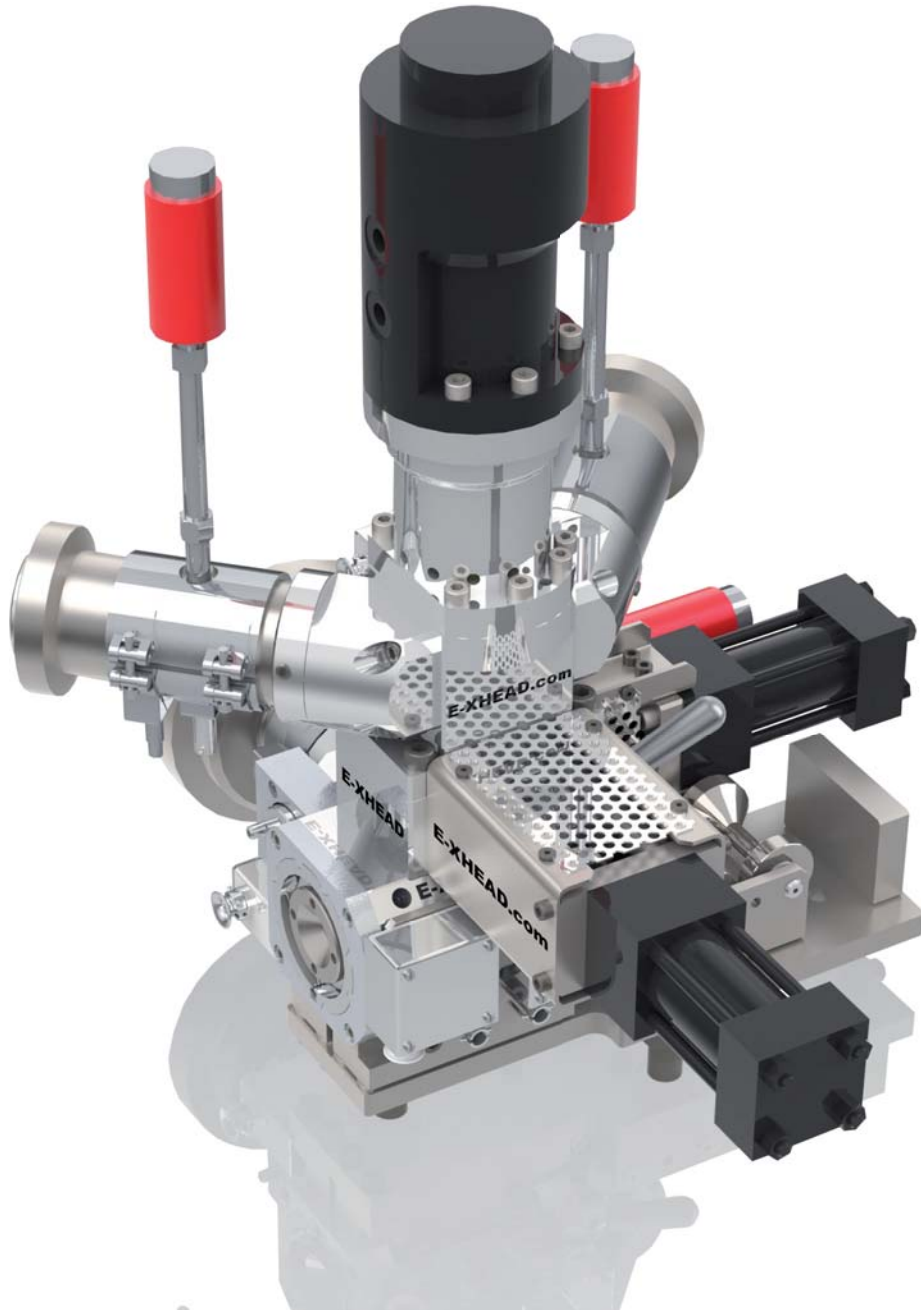

E-XHEAD® Model C crossheads are designed for Quick Colour Change while the extrusion lines is in productions. **E-XHEAD® C** system is actually the most flexible System available on the market as any combination of Cables production are possible only by changing insert Cartridge R system. **System C allows drastic reduction of scrap and Down time.**


System C-A

working with
 1 main extruder
 2 auxillary extruders
 For quick change of stripes or skin.
 Colour switch valve bleeding

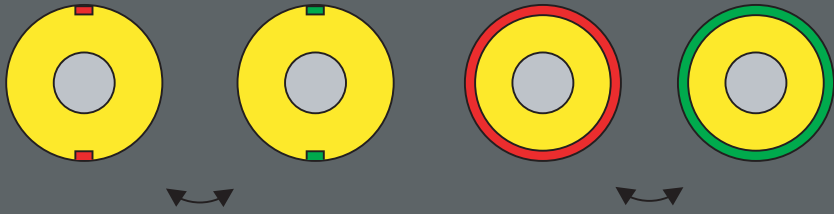

System C-B

working with:
 2 main extruders
 1 optional auxillary extruder for stripes.
 For quick change of main layers
 Colour switch valve crossing the two main layers

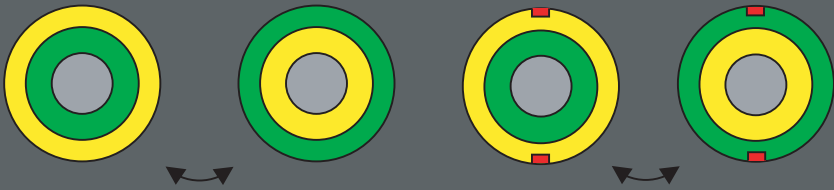


System C-C

working with:
 1 main extruder (Neutral colour)
 2 auxillary extruder for stripes.
 1 optional auxillary extruders for stripes
 For quick change of main layers
 Colour switch valve crossing the two skin or stripes




System C-D


working with:
 2 main extruder
 2 auxillary extruder for stripes.
 For quick change of main layers
 Colour switch valve crossing the two main layers and the two stripes

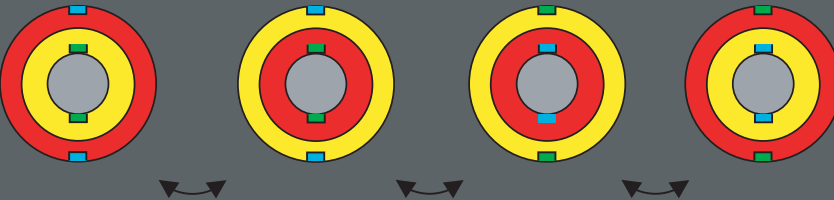

C

E-XHEAD.com

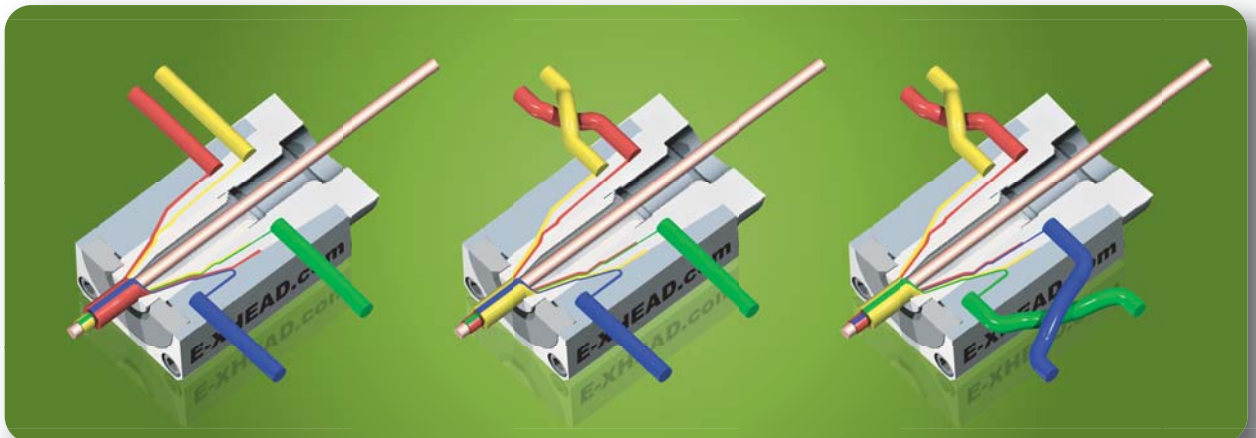

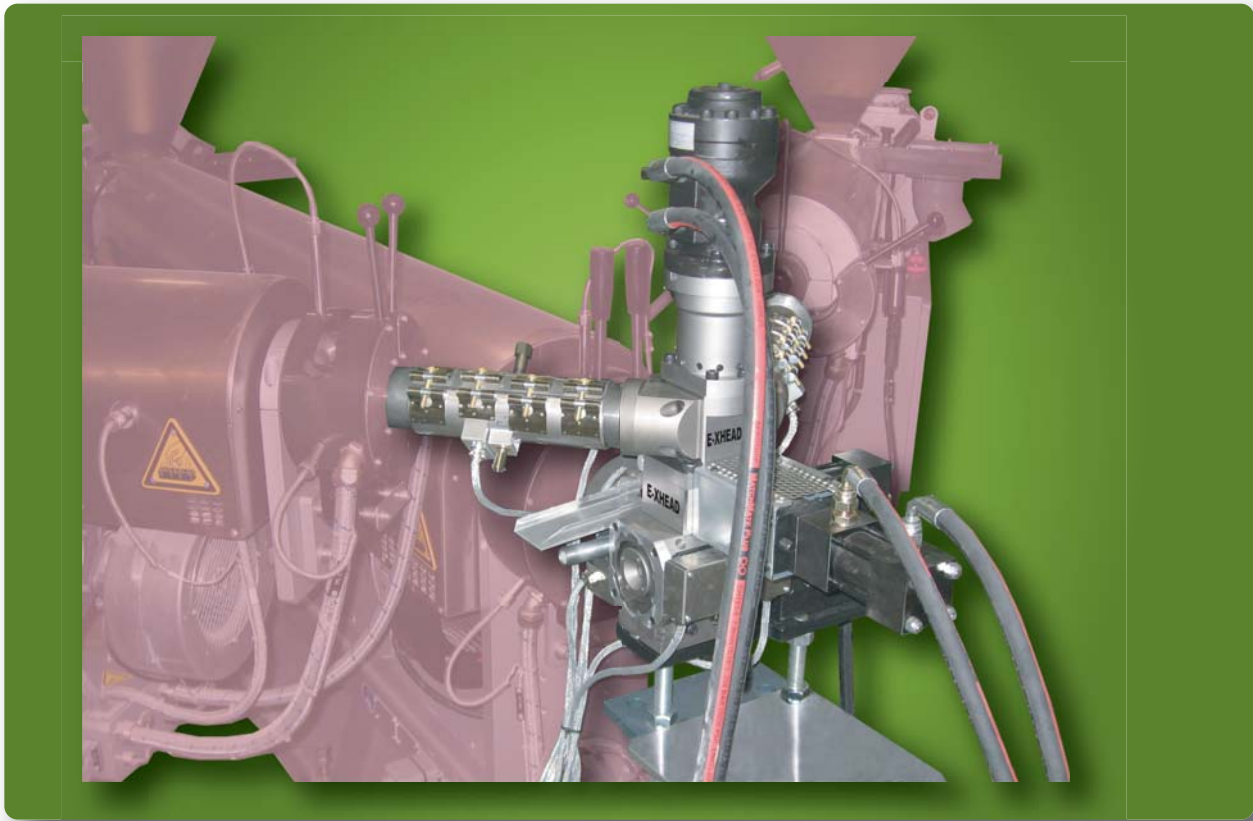

R System Rapid Cartridge / Tool Change in less than 1 minute

Model "R" crossheads for Quick Head / Insert change, has been developed for changing the tools / crosshead insert in less than 1 minute. The main advantage is that the head insert support is fixed on the extruders and does not require removing or automatic clamp. As well as no further alignment is required . The "R" system can be connected up to five extruders. The tools / crossheads insert change and pre-heating is possible while the line is in production. **R crosshead are suitable for flexible and short length production.**



Model	C-1	C-2	C-3	C-4
Ø Max Conductor	6mm	16mm	25mm	35mm
Ø Max Insulation	10mm	20mm	35mm	45mm

Please do not hesitate to contact us for any further information on our products range.
E-XHEAD® Highly qualified engineers will reply to submit best possible solutions.